

**Journal of the
BOSTON SOCIETY
of
CIVIL ENGINEERS SECTION
AMERICAN SOCIETY
of
CIVIL ENGINEERS**



VOLUME 65

OCTOBER 1978

NUMBER 3

**JOURNAL OF THE
BOSTON SOCIETY
OF
CIVIL ENGINEERS SECTION
AMERICAN SOCIETY
OF
CIVIL ENGINEERS**

Volume 65

October 1978

Number 3

CONTENTS

PAPERS

- Structural Design Considerations in the Marine Environment**
John W. Gaythwaite 67

PROCEEDINGS

- Meetings Held - Technical Groups** 93

Copyright, 1978, by the Boston Society of Civil Engineers
Section American Society of Civil Engineers
Second-Class postage paid at Boston, Massachusetts

Published four times a year, January, April, July, and October, by the Society
80 Boylston Street, Boston, Massachusetts 02116

Subscription price \$10.00 a Year (4 Copies) .
\$2.50 a copy

All orders must be accompanied by check
Members' subscriptions are part of their dues.

**BOSTON SOCIETY OF CIVIL ENGINEERS SECTION
AMERICAN SOCIETY OF CIVIL ENGINEERS
OFFICERS 1978-1979**

PRESIDENT

Howard Simpson

VICE PRESIDENTS

William S. Zoino
(Term expires 1979)

Frank E. Perkins
(Term expires 1980)

SECRETARY

Leo F. Peters

TREASURER

Saul Namyet

DIRECTORS

Edward B. Kinner
Richard J. Scranton
(Terms expire 1979)

Robert L. Meserve
Stanley C. Rossier
(Terms expire 1980)

PAST PRESIDENTS-BOARD MEMBERS

Charles A. Parthum

Bertram Berger

Charles C. Ladd

VICE PRESIDENT, WESTERN MASS. BRANCH, Thomas W. Bean

NATIONAL VICE PRESIDENT, ZONE 1, Cranston R. Rogers

NATIONAL DIRECTOR, DISTRICT 2: John J. Cusack

TECHNICAL GROUPS

COMPUTER: Salvatore G. Mazzotta, Chairman
John D. Goodrich, Clerk

CONSTRUCTION: Stephen G. Walker, Chairman
Robert C. Hoyler, Clerk

ENVIRONMENTAL: Warren H. Ringer, Chairman
Steven H. Corr, Clerk

GEOTECHNICAL: David E. Thompson, Chairman
Joseph D. Guertin, Clerk

HYDRAULICS: Richard DiBuono, Chairman
Russell C. Peterson, Clerk

STRUCTURAL: Frank B. Davis, Chairman
James M. Becker, Clerk

TRANSPORTATION: A. Russell Barnes, Jr., Chairman
Edmund J. Condon, Clerk

(Committee Chairmen are listed on inside back cover)

JOURNAL EDITOR - Edward C. Keane

EXECUTIVE DIRECTOR - Mrs. Charlotte E. Dalrymple

ADMINISTRATIVE SECRETARY - Ms. Susan Albert

**STRUCTURAL DESIGN CONSIDERATIONS
IN THE
MARINE ENVIRONMENT**

By
John W. Gaythwaite, P. E.*

Introduction

The ocean is a restless continuum of rising and falling tides, circulating currents, and sporadic wind driven waves. It is teeming with both delicate and resilient life forms. It is subjected and exposed to the full fury of natural events such as winds, sea motions, meteorological extremes, and seismic and astronomical disturbances. Life in the ocean remains in delicate balance with life on land.

The time has come when man has returned to the oceans from which his ancestors evolved to construct more permanent structures both fixed and floating, some built below the surface on the very sea bed itself. Time has come, then, when man becomes aware of the life and physical processes going on in the sea. Much work remains to be done in understanding the world ocean climate, in the development of more accurate hydrodynamic theories and statistical representations of waves and currents and in the understanding of life processes in the sea. It is hoped that the following overview of the problems involved in the design of ocean structures will serve to point out areas where information is still lacking.

The overall behavior of the oceans and causes of sea motions and propagation of sea life are most complex and fascinating, but only the ultimate effects they have on sea structures are considered here.

As to the ocean waters themselves they are relatively homogeneous and exhibit subtle differences in temperature, salinity, and density. Seawater has a mean specific gravity of 1.026 which varies slightly with differences in temperature and salinity. The temperature of the oceans is relatively constant at depth. Mean surface temperatures vary from near 29°F (-1.5°C) in the Arctic to as high as 85°F (29°C) in the tropics. The mean salinity, or saltiness, of the ocean is 35 parts per thousand, ranging in extremes from 33 to 38 parts per thousand in the open sea. Near shore, coastal water, salinities may be considerably less due to fresh water runoff. Oceanic surface water contains approximately 5 ml/liter of dissolved oxygen at a temperature of 68°F (20°C). Seawater is slightly basic, with a mean pH of about 8.3. Under certain conditions when the water becomes rich in nutrients, marine organ-

*Project Engineer, Crandall Dry Dock Engineers, Inc., Dedham, Massachusetts.

isms utilize all the free oxygen, and hydrogen sulfide is produced by certain anaerobic bacteria, causing accelerated corrosion of metal structures. The pH drops considerably under these conditions.

The sea floor in many harbors is covered with a layer of soft organic silts. The high water content, low unit weight, and low shear strength which are characteristic of ocean bottom sediments give rise to difficult foundation problems.

All sea motions, waves, currents and tides, can be described by differences in velocity and pressure as functions of space and time. Basic sea motions are discussed herein as to their effect on structural design. Further description of the oceans and of their processes and movements of particular interest to engineers is found in references [1] through [5].

NOMENCLATURE

C	=	wave velocity (celerity)
C_D	=	drag force coefficient
d	=	water depth
g	=	acceleration of gravity
γ	=	unit weight
H	=	wave height
h	=	extreme high water depth above M.H.W.
L	=	wave length
n	=	wave crest height above S.W.L.
P	=	force per unit area (pressure)
V	=	velocity


ABBREVIATIONS

L.W.O.S.T.	=	low water on spring tide
M.H.W.	=	Mean high water
M.L.W.	=	Mean low water
psf	=	pounds per square foot
S.W.L.	=	Stillwater level
R.H.	=	Relative humidity

General Concepts

Some general design considerations are illustrated in Figure 1. Primary considerations would be those of direct structural loadings such as those imposed by wind, waves, currents, ice, and hydrostatic pressure. Secondary considerations (although sometimes they are of primary importance) would include operational and functional effects, such as the variation of water levels (tides and stormwater levels), secondary effects of currents such as scour and deposition and the possibility of induced vibrations, general deterioration manifested as corrosion of metals, decay of wood, attack by marine organisms, fouling, secondary effects of ice, i.e., freezing and thawing, and general deterioration due to the random and cyclic nature of the loadings.

Wind, wave and current loadings exhibit both temporal and spatial varia-

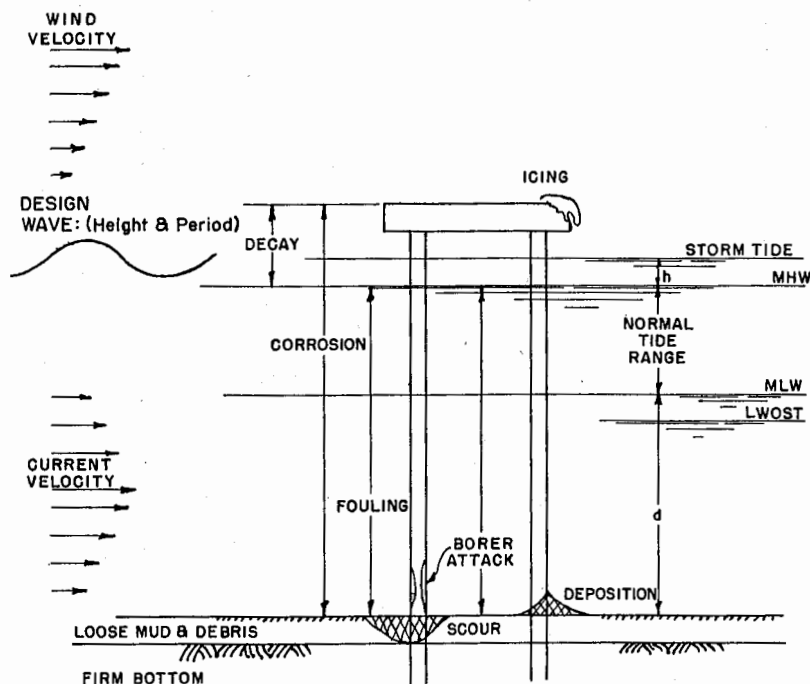

MAXIMUM WATER DEPTH (STORM TIDE) = $d + \text{tide range} + h$

where: d = nominal water depth (M.L.W.) given on charts

h = astronomical + barometric + wind stress

Figure 1. Ocean Structure-Design Considerations

tions, for example, the unsteady and non-uniform loads due to wind gusts; also, the multi-directional nature of loadings such as rotary and reversing tidal currents must be considered. As there is generally *uncertainty* as to what severity of storm conditions a given structure might be subjected to, the concepts of *risk* and *design life* become important. Once the lifetime over which a structure is required to operate usefully has been determined, then the most severe storm and resulting sea conditions that may occur during that lifetime may be evaluated by hindcasting techniques or more theoretical forecasting methods [6] [7]. When the likelihood of a given storm occurring at the structure site is predicted, then the risk of designing for that storm or something less can be evaluated in terms of economics or safety requirements. Such likelihood is conveniently expressed in terms of a *return period* (in years) associated with the recurrence of extreme events [8].

The previously mentioned factors are next discussed individually with regard to how they should be considered in structural design. In addition some special effects that may be of local concern are mentioned that may be discarded as a problem or delved into further as the occasion warrants. Design of marine structures in general is covered in references [9] through [14].

Overwater Wind

Wind effects on structures are certainly not peculiar to marine structures; however, in general, marine structures are subjected more to the full fury of the wind and at greater frequency than land-based structures. Further, at high wind speeds, the air can become entrained with sea water, thus imparting higher effective wind pressures [5]. Wind speed is normally recorded at 33 feet (10 meters) above sea level. The velocity at the sea surface is near zero and it increases with altitude approximately as the one seventh power of the altitude in the open sea. In coastal areas however this exponent will be greater due to retardation of the lower level of air by the land (see Figure 2). It is customary to design for the so-called *fastest mile of wind*, which is the maximum velocity corresponding to a gust length of one mile. This accounts for the fact that wind forces are unsteady or vary with time. The averaging time interval, therefore, depends upon the maximum velocity recorded; that is, a 60 mile per hour wind would have to be sustained for one minute to be considered as the fastest mile of wind. Guidance for design windspeeds in the United States can be found in the work of Thom [15].

Because of the extreme exposure, due consideration should be given to both the vertical distribution and multi-directional nature of the wind at sea. As, in general, no building codes are in effect governing design wind pressures for sea structures, the designer must have a good grasp of basic aerodynamics, particularly as regards the choice of proper drag coefficients on various structural configurations. Figure 3 represents a plot of the dynamic

drag force equation; when the design wind speed has been selected the problem of wind force can be reduced to one of selecting the proper drag coefficient [16]. In bottom supported sea structures wind forces become more significant as they are applied at a height where they create the maximum moment per unit of force.

Winds are the direct cause of what are the major design loadings for offshore structures namely: waves.


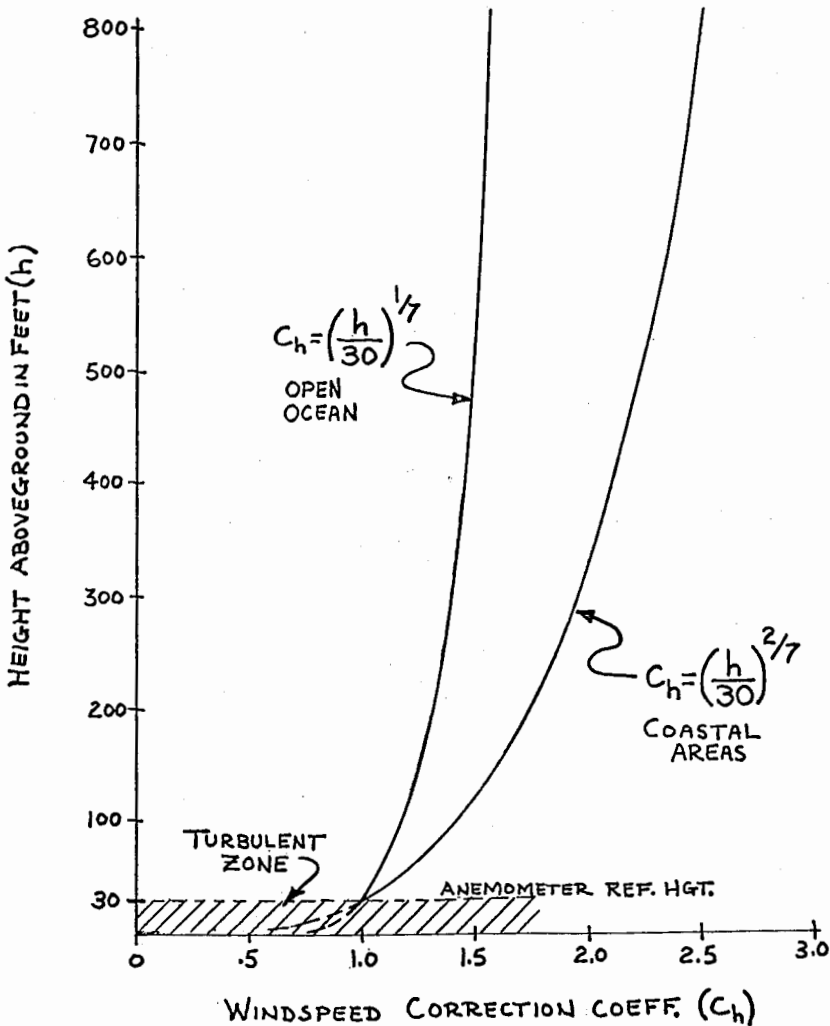


Figure 2. Vertical Distribution of Wind Velocity

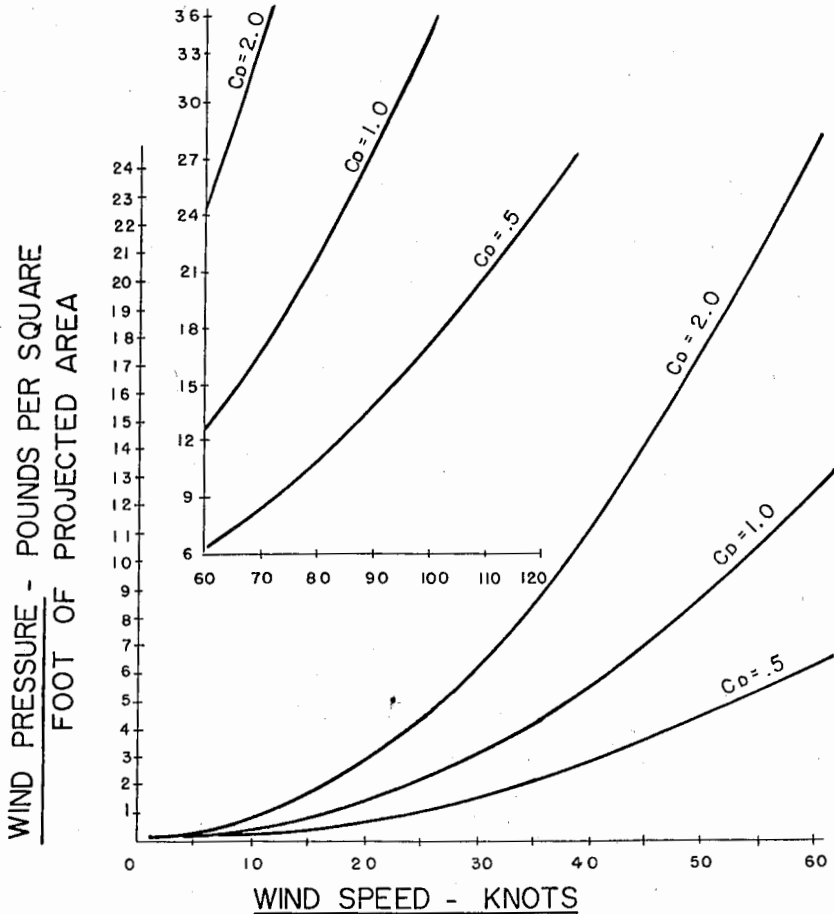

From Dynamic Drag Equation : $P = \frac{1}{2} \frac{\rho}{g} V^2 C_o$
 For V in knots and P in p s f : $P = .0034 V^2 C_o$

Based on Standard Atmosphere: air at 29.92" hg
 59° F R.H. = 0%

Figure 3. Wind Pressure vs. Wind Speed

Waves

Waves are periodic undulations of the sea surface. The majority of waves, especially those of interest in structure design, are caused by the wind. The maximum dimensions of a wave depend upon three parameters basic to wave forecasting. They are: *fetch* or the distance over which the wind blows,

the velocity of the wind, and the duration of time for which the wind blows. A fully developed sea occurs when the fetch is essentially unlimited and the wind blows for a minimum required length of time for the given wind speed; a more or less steady state situation is reached when the average wave heights no longer increase. The concept of a fully developed sea is basic to wave forecasting and to estimating the maximum wave height that may occur at a given site.

A real sea is composed of waves of seemingly randomly varying lengths, heights and periods. Oceanographers attempt to make order of such chaos by characterizing the sea in terms of a so-called significant wave. A significant wave is defined as the average of the highest one third in a wave train over a given period of time. The tabulation below, compiled from data given in reference [5], gives the significant wave heights to be expected at sea for a uniform wind of constant velocity provided the wind blows over the minimum fetch and for the minimum duration.

Wind Velocity (knots)	Significant Wave Height (feet)	Minimum Fetch (nautical miles)	Minimum Duration (hours)
10	1.4	10	2.4
20	8.0	75	10.0
30	22.0	280	23.0
40	45.0	710	42.0
50	78.0	1420	69.0

For wind velocities greater than 50 knots, fetch lengths and/or minimum durations required to develop the sea fully are seldom obtained. Approximate relationships between significant wave height and other statistical values are as follows:

Average height	0.64
Significant	1.00
Highest 10%	1.29
Highest	1.87

Wave height (H) is the distance from trough to crest and wave length (L) is the distance between successive crests (see Figure 4). The period (T) is the time taken for two successive crests to pass a fixed point.

Wave speed (C), sometimes referred to as celerity to emphasize that it is the wave form that is moving and not the water itself, is related to the period by the approximate relation:

$$C = 5.12 T$$

for C in feet per second and T in seconds, and the length in feet is:

$$L = 5.12 T^2$$

These relations are valid for so-called *deep water* waves where the water depth (d) is greater than about half the wave length. When waves approach shallow water, or shoal, their heights begin to increase and lengths decrease until the particle velocities in the wave crest exceed the retarded forward motion and the wave breaks. The speed of shallow water waves, where d is less than $L/2$, is given by: $C = \sqrt{gd}$ where g is the acceleration of gravity and d is the water depth as before. These formulas, based upon Airy's small amplitude wave theory [17], are summarized in Figure 5.

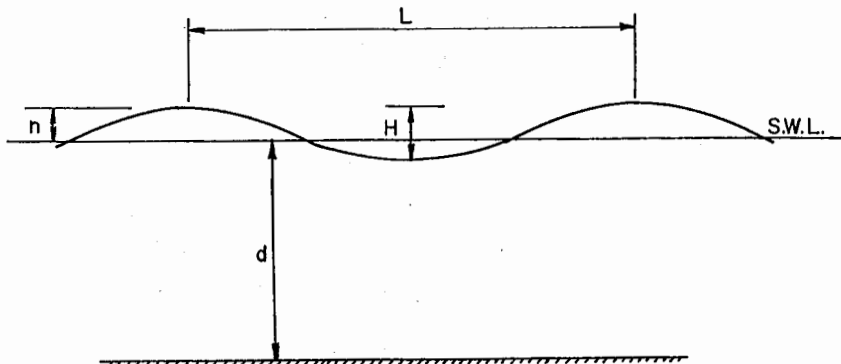


Figure 4. Wave Definition Sketch

Waves in the open ocean generally begin to break when their steepness (H/L) exceeds $1/10$ approaching the theoretical limit $H/L = 1/7$. The maximum crest elevation (n) is usually from $.55H$ to $.75H$ above the nominal still water level (S.W.L.). This fact may determine the bottom elevation of a fixed offshore platform; for example, when the maximum crest elevation of the design wave is added to the maximum storm water depth.

The concept of a *design wave* [18] and [19], which is a wave of selected dimensions to give maximum structural loadings, is based on forecasting techniques and statistical analysis of the probability of such a wave occurring at the site. It is customary to select a design wave height and period and then choose an appropriate wave theory for the water depth and site conditions which will yield the water particle velocities and geometry of the wave surface.

Waves impose various types of loads on various types of structures. The basic kinds of structural loadings result from the wave patterns illustrated in Figure 6. Fairly massive structures situated in shallow water may be subjected to breaking wave pressures. Waves typically break when the water depth becomes less than $1.3H$, or if the water depth is too great for the wave to break, it may be reflected by the structure, imposing very different pressure distributions for each case.

$$C^2 = \frac{gL}{2\pi} \text{TANH} \frac{2\pi d}{L}$$

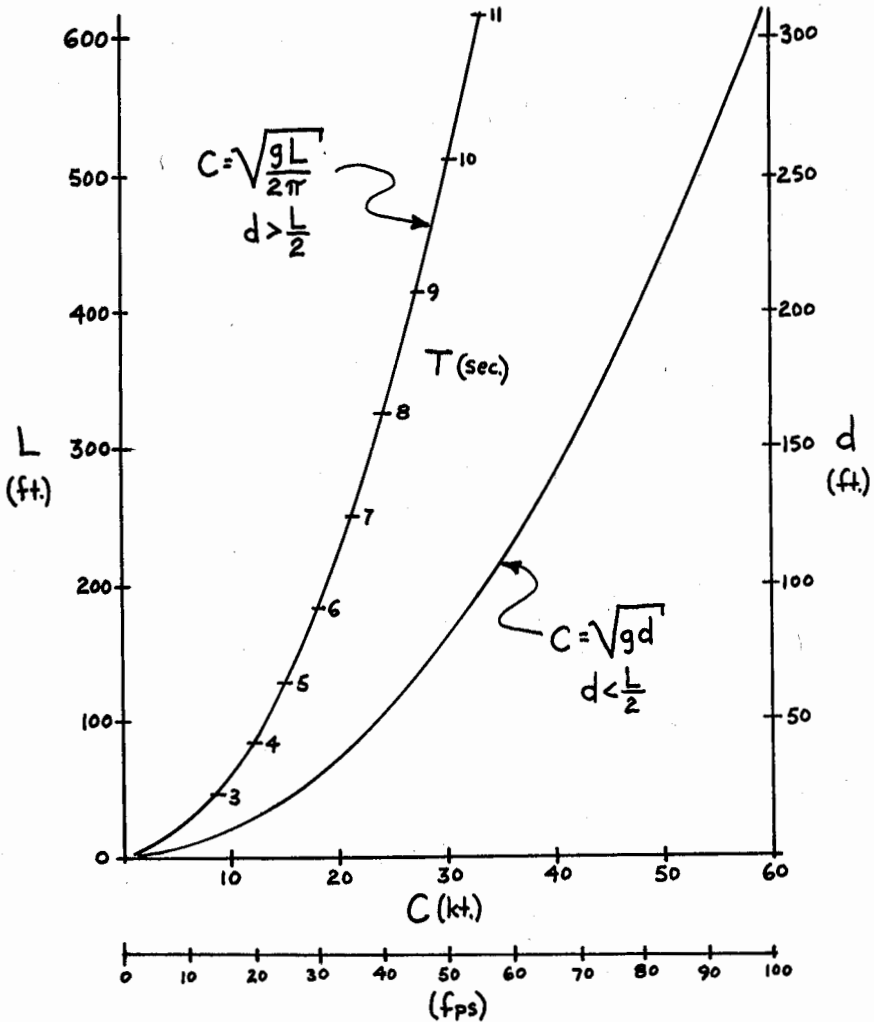


Figure 5. Wave Speed vs. Wavelength and Water Depth

Breaking waves impose by far the highest peak pressures as the full energy of the wave impact has to be dissipated on the structure. Reflected waves of the same height impose much milder loadings as their energy is used in forming new waves and in running up the face of the structure. For example,

Denny [20] found the maximum shockwave pressures to range from 28 to 100 times γH (where γ is the unit weight of water and H is the incident wave height) for breaking waves, while Minikin [10] suggests a design value of $1.66H$ for reflected wave pressures. In addition to direct inertial loadings breaking waves cause scour at the base of structures and high velocity vertical water movements that may shear off appurtenances on the face of the structure. Concrete and stone walls may eventually be destroyed by a repetitive water hammer or air compression effect when pockets of water or air are trapped in crevices in the face of the wall. Sand entrained in breaking waves can have a tremendous abrasive effect and quickly erode bulkheads and retaining walls located on sandy beaches.

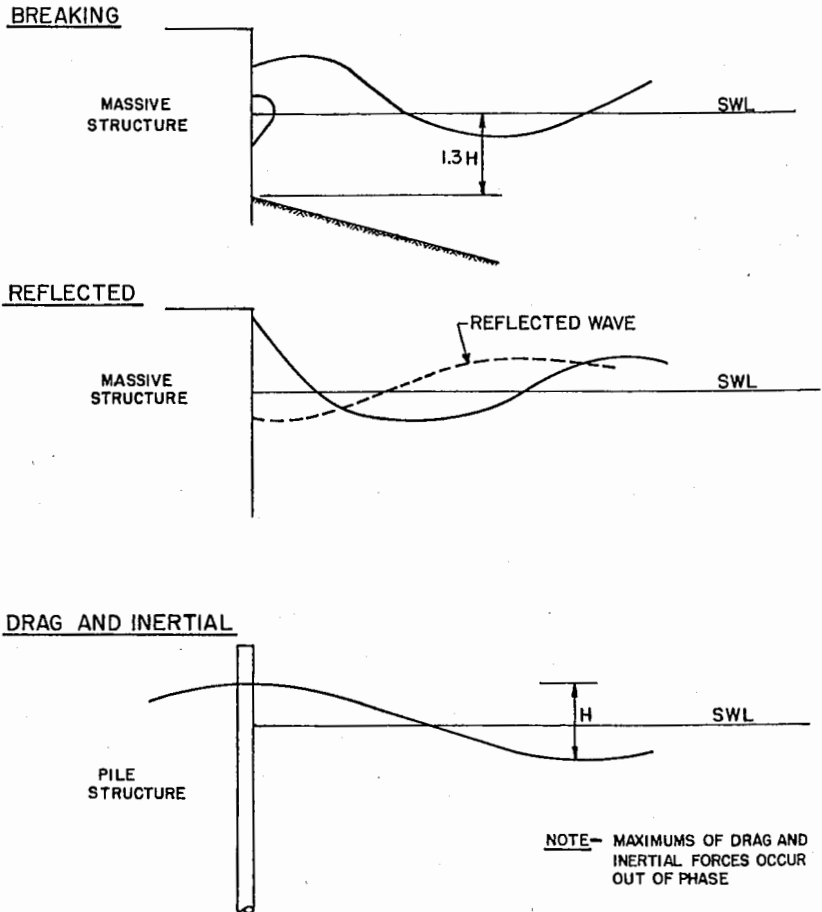


Figure 6. Types of Wave Forces

Waves also exert drag and inertial forces in deep water open type structures. It is customary to calculate the drag and inertial components of force independently and then add them vectorially as maximums occur out of phase. The maximum drag force occurs at the wave crest position where water particle velocities are maximum, and the peak inertial force occurs about one quarter of the wave length after the passage of the crest where the water particle accelerations are greatest. Standard methods of wave force calculations are given in references [5], [9], and [14].

When waves approach a shoreline or fixed barrier they change direction, called refraction and diffraction respectively, just as light changes direction in passing from one medium to another. Refraction and diffraction studies are of the utmost importance in planning many coastal facilities, particularly shore protection structures such as breakwaters and jetties. Such topics are beyond the scope of this paper, as are littoral processes such as rip and longshore currents set up by breaking waves, and transport of beach sands, all of which are well covered in references [12] and [14].


Currents

Major ocean currents are of two different types: the surface wind-driven currents that form the great clockwise gyres in the northern hemisphere, counterclockwise in the southern hemisphere, and the deeper running thermohaline circulation that responds to differences in density of water masses. Although the ocean circulation is of intense interest to the oceanographer, it is not usually a consideration in structural design as the major ocean currents are slow moving and remote from shore. Nearshore and over the continental shelves, tidal currents and storm generated wind-stress currents are of primary interest to the structural designer. Offshore, tidal currents are rotary, changing in speed and direction through all points of the compass during a tidal cycle; while along coastlines and in harbors and estuaries they are reversing, flowing in opposite directions during flood and ebb.¹ Nearshore tidal currents range from speeds of 1 knot (1 nautical mile per hour) or less to extremes of 8 knots or more. During spring tides they may run 20% or more in excess of their normal velocity. The usual vertical distribution of current speed in shallow water shows minimum speeds (*strengths*) at the bottom, with maximum velocity occurring near the surface. However, in many river entrances and harbor channels, flood and ebb currents may flow in opposite directions at the surface and on the bottom during the changing of the tide. In lieu of actual measurements the vertical profile can be assumed to vary as the one-seventh power of the water depth [21], [22], & [23] as shown in Figure 7.

¹Incoming currents corresponding to a rise in water level are called *flood* currents (or tides) while outgoing currents and falling water levels are referred to as *ebb* currents (or tides).

Strong winds blowing for durations of 12 hours or more set up wind stress surface currents which usually run at about 1% to 3% of the nominal wind speed. Wind stress currents flow 15 to 45 degrees to the right of the wind direction in the northern hemisphere and to the left of the wind in the southern hemisphere due to deflection by Coriolis² force. Wind stress currents diminish rapidly with depth, however reference [22] suggests assuming a linear distribution from zero at the seabed to maximum at the sea surface. Figure 7 shows the vectoral addition of tidal and wind stress currents to yield the final design profile. The *Tidal Current Tables* published annually by the National Oceanic and Atmospheric Administration (N.O.A.A.), National Ocean Survey, contain valuable information on both tidal and wind driven currents for United States coastal waters.

The possibility of dynamic effects such as induced vibrations via vortex shedding³ should be considered, especially at shallow water sites with fast currents. Current velocities should be added vectorially to the design wave particle velocities to get the maximum total forces to be expected. Currents opposing the wave direction have the effect of increasing wave heights and

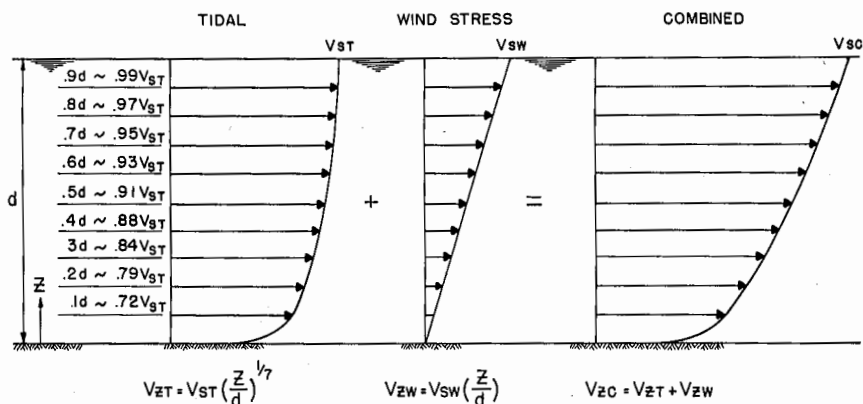

OFFSHORE FOR SMOOTH, HORIZONTAL BOTTOM THE ABOVE PROFILES CAN BE USED WHEN ACTUAL MEASUREMENTS ARE NOT AVAILABLE.

Figure 7. Current Velocity Profiles Assumed for Structure Design

²Coriolis force is not really a force at all but is the apparent deflection of a particle trajectory due to the rotation of the earth. It is most pronounced near the equator and least effective near the poles.

³Vortex shedding is the fluid dynamic phenomenon of vortices being shed from the trailing edge of a body in a stream. At certain relative flow speeds vortices may be shed alternately from one side and then the other of a flexible structure, which exacerbates this process by its own movement; thus resonance is achieved and the structure may vibrate wildly.

steepness, while following currents have the opposite effect. Currents cause scouring at the base of structures, or a newly placed structure may cause currents to drop their sediment load causing unwanted deposition.

Underwater landslides may cause the fastest and most devastating of currents known as turbidity currents. Such currents may rush down a slope at velocities of up to 50 knots and are known to have caused damage to underwater cables [24].

Currents increase the rate of galvanic corrosion. In the case of steel for example, the quiescent rate of corrosion may be doubled by a 2-knot current; the corrosion rate is proportional to water velocity. Currents may also serve as a transport mechanism for marine organisms such as the larval stage of the teredo (to be discussed).

The calculation of current forces can be carried out using the fluid drag equation (already introduced) and applying the proper drag coefficient (C_D). This equation is plotted in Figure 8 for various C_D 's at normally encountered current speeds. For moored objects such as ships, it is customary to add to the dynamic drag a friction drag component by multiplying the immersed surface area, the square of the velocity, and a semi-empirical coefficient [9]. Also, a term for complicated appendages may be added, such as the additional drag caused by a ship's propeller. Another approach is to conduct model tests to get the dynamic portion of the current drag. The results of model tests of similar structures can be pro-rated using the laws of similitude. Reference [11] presents model test data for several ship types in various current speeds through all angles of yaw.

It is important to recall that drag coefficients vary with Reynolds number, aspect ratio, configuration and surface roughness. Local proximity effects, as for example of bracing in multi-legged platforms should be considered as they tend to increase drag forces. In special cases where an accurate assessment of current loads must be made, it would be wise to consider also an added mass effect due to the unsteady nature of the loading. During design the effects of fouling should be accounted for by an appropriate increase in projected area and/or surface friction coefficient.


Tide

Tide is a vertical rise and fall of the ocean in response to the gravitational attractions of the sun and moon. As gravitational attraction varies with the square of the distance, the relative closeness of the moon means that tidal variations closely follow the moon's motion. At times when the sun and moon are in line with respect to the earth, their gravitational effects are additive and higher than average *spring tides* result. Tidal ranges are correspondingly lower with *neap tides*, when the moon is at quadrature.

Tidal datums such as mean low water (MLW) as used in the United States serve as *bench marks* (reference datums) to engineers working in the ocean

and the meaning of them and extreme variations from them must be well understood. Tidal datums for the world are well covered in reference [25]. All tidal datums should be based on a 19-year averaging period as the moon completes a cycle of characteristic motions during this period of time.

Tides vary in the number and extremes of highs and lows each day. The normal tide is a *semi-diurnal* type exhibiting two highs and two lows of about equal height, each day. The normal semi-diurnal interval is about 6 hours and 13 minutes between highs and lows. The semi-diurnal tide normally

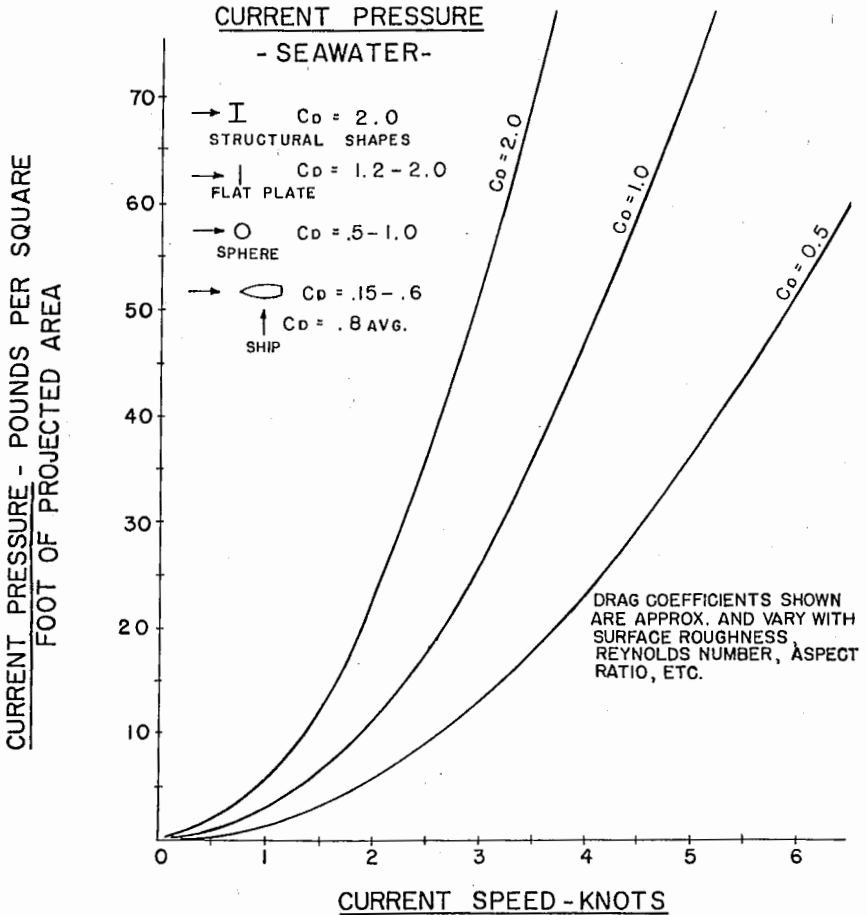

From Dynamic Drag Equation : $P = \frac{1}{2} \frac{8}{9} V^2 C_D$

For V in fps and P in psf : $P = V^2 C_D$

Figure 8. Current Pressure vs. Current Speed

begins its rise from low water at an increasing rate to about mid-height whereupon the rate of flood decreases until high water. A period of *stand* of about one hour is normally observed where the water remains at relatively constant elevation.

Tides are modified by Coriolis force, shape and location of land, friction and inertial forces and locally by other oscillations of the sea surface. At some locations one high and one low water a day are observed; this is known as a *diurnal* tide. Tidal variations somewhere between semi-diurnal and diurnal tides are known as *mixed tides*. Figure 9 presents typical tide curves for several U. S. ports which illustrates the variations discussed. Tides also go through more subtle seasonal variations such as perigean and apogean tides, occurring when the moon is closest and farthest from the earth respectively, and those variations associated with the moon's declination and long term aberrations and earth's distance from the sun. Tide prediction is very complex and it is sufficient to rely on published tide tables for most engineering purposes. Tide tables are published annually by N.O.A.A., National Ocean Survey, which cover most all world ports in four volumes.

Storm Tide


During periods of intense storm activity the reduced atmospheric pressure allows a rise in sea level. This rise due to reduced barometric pressure alone may be on the order of 1 to 2 feet (.3 to .6 meters). A good rule of thumb is that a 1 foot rise in sea level corresponds to about a 1 inch drop in a mercury barometer. Dynamic enhancement of this effect may occur in some locations when the storm low pressure center moves at a synchronous speed with the shallow water wave velocity.

High winds blowing onshore or even parallel to shore may cause water to pile up against the land due to wind stress and its associated surface currents [26]. In some areas, especially in narrow estuaries, this pile-up may amount to several feet.

If both barometric and wind stress tides occur at the same time as spring tides, exceptionally high water elevations may be reached. The frequency and probability of extreme high tides for the U.S. Atlantic Coast is covered in reference [27]. When working in areas where storm records do not exist the engineer should investigate carefully potential extreme high water conditions, as such conditions can exert an excessive buoyant uplift on a structure or cause overtopping and consequent flooding.

Figure 10 summarizes factors contributing to extreme high (design) water levels. Beaches are susceptible to a *wave set-up* in water level in addition to the barometric and wind stress tides previously discussed. Hansen [28] found the maximum set-up can reach values of up to 30% of the incident significant wave height at the set-up line.

Reference [14] lists high water records for various U.S. coastal locations and gives graphs for estimating values of storm surge. In general, storm surge

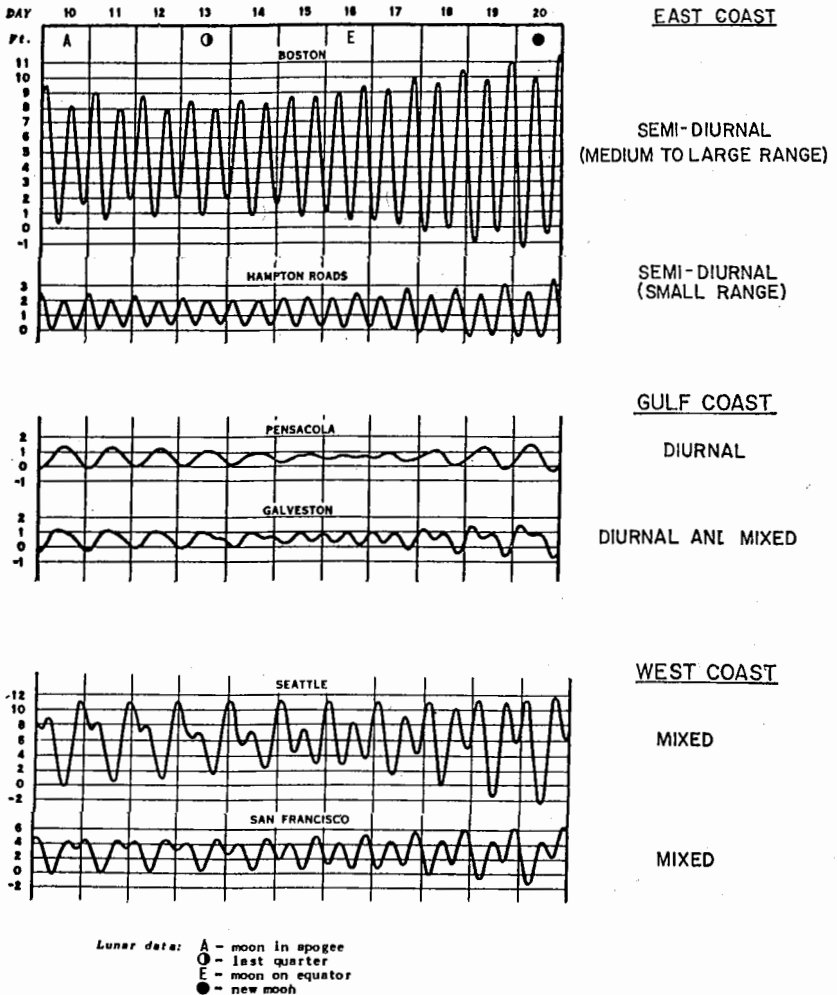

FROM "TIDE TABLES" U.S. DEPT. OF COMMERCE
NATIONAL OCEAN SURVEY

Figure 9. Typical Tide Curves for Selected U.S. Ports

calculations are carried out by experienced meteorologists and oceanographers using high speed computers.

For structures with long design lives some designers may add an increase in design water level to account for the long term rise in sea level which averages approximately 1/8 inch/year (.34cm/yr.) for the coastal United States. This centennial rise is discussed in detail by Hicks and Shofnos [29].

Special Considerations

Other considerations of particular concern at certain locations, but not of general concern, include forces of impact, harbor oscillations, seismic sea waves (tsunami's), fatigue and wear, and geological conditions peculiar to the marine environment.

Impact should be considered in structures that are likely to have vessels moored alongside or that are exposed to floating debris (flotsam), logs or icebergs, for example. Impact forces are normally calculated by energy methods assuming a mass and velocity, and direction and angle of incidence of the impacting body. Designing for berthing ships and impact forces is discussed in references [9] and [13].

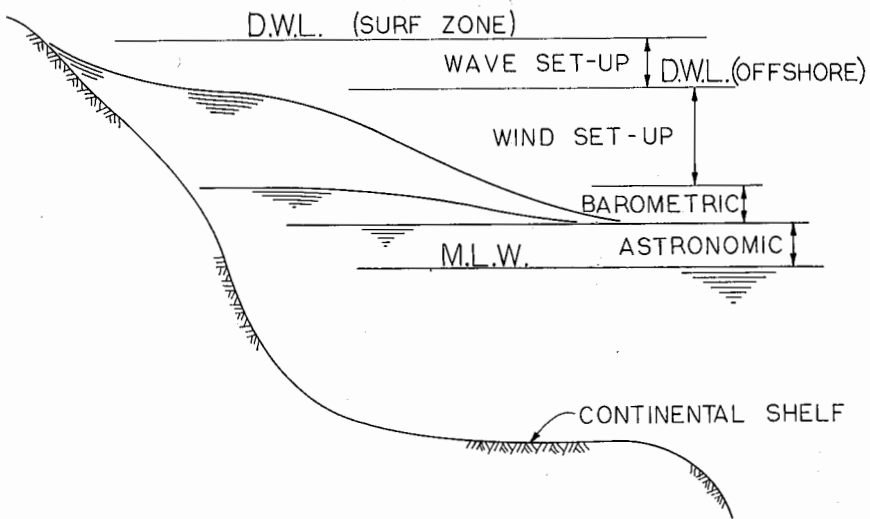


Figure 10. Design Water Levels (Storm Tide)

Certain harbors and even larger basins open to the ocean experience a sloshing motion manifested in a periodic rise and fall of water level due to resonance with a disturbing force. The disturbing force may be meteorological, such as a low pressure system travelling rapidly eastward, or oceanographical, such as the period of wave trains at the mouth of a harbor coinciding with the natural period of oscillation of the harbor basin. Such harmonic oscillations in harbors are known as *seiches*. Seiches may be of critical importance in the planning of ports and harbor facilities [13] but are beyond the scope of this paper.

Very high velocity waves of long wave length but small height, are produced by underwater earthquakes and landslides. Such seismic waves are called "tsunami's" (Japanese for tidal wave!) and travel near the maximum theoretical wave speed: $C = \sqrt{gd}$, governed only by the depth of water and the acceleration of gravity. When such waves approach a shoreline their height builds tremendously, even though they may not even be detectable at sea, causing large scale destruction and flooding of coastal facilities in the more severe instances [3].

The susceptibility of a structure to tsunami waves should be considered in the siting as it may be virtually impossible to design a tsunami-proof structure because of the tremendous forces and high water levels involved. Van Dorn [30] summarizes the engineering aspects of tsunamis. Direct earthquake effects should of course be considered as in the design of land-based structures. The ocean however, may provide a greater damping effect than observed in shore structures.

A *tidal bore* is a single wave front charging up a narrow estuary. Bores exist only in a few locations, such as in the Petitcodiac River in the upper regions of the Bay of Fundy, and their influence on structural design would require designing for the full impact of a wall of water travelling at a given velocity. Since bores exist only under special topographic conditions, they are not considered further here.

Because of the repetitive and periodic nature of wave loadings, fatigue should be considered in the design of offshore structures, especially if the structure is susceptible to vortex shedding and induced vibrations. When the period and amplitude of waves of significant spectral energy are predicted for various storm conditions they can be compared with the natural periods of oscillation of the structure itself.

Floating structures are particularly susceptible to the resonant effects of waves and wave trains and may respond to many different wavelengths and their corresponding frequencies in a wave spectrum if there is sufficient energy in that spectral band. Floating breakwaters in particular should be carefully investigated in this respect [4].

Wear and chafe is a constant problem at sea, especially of mooring lines and cables where they lead across or are attached to a structure. Extra thickness of metal or metal rubbing plates should be provided where such wear is likely.

The ocean bottom is typically covered with a layer of detritus material and dead organisms which have settled to the bottom. In the open sea, oozes⁴ and fine sediments may be many feet thick and present obvious foundation problems. Harbor bottoms are typically covered with a black organic silt which must be accounted for when making soundings to firm bottom.

⁴Oozes are the accumulation of the calcareous and/or silicious skeletons of tiny marine organisms that have settled to the bottom after the organisms' death.

Ice

Ice exerts uplift and crushing forces on structures and adds to the gravity loads. Ice freezing around a pile may lift it on a rising tide. This is usually a progressive process and is called *jacking*. Ice sheets held against a structure by wind or current stress or constrained ice which is subject to expansion due to a rise in temperature develop a horizontal thrust which is proportional to the ice thickness. Gerritsen [31] discusses the effects of ice on hydraulic structures.

Some typical values of the mechanical properties of sea ice are summarized in Figure 11. These values are based upon a review of a wide range of experimental results and should be applied with caution as the properties of sea ice are difficult to predict and vary greatly with temperature, salinity, age and rate of freezing etc. Brown [32] has summarized the results of some recent investigations into arctic ice mechanics.

Ice expands 9% in volume on freezing due to a rearrangement in the crystal lattice of water molecules; therefore care must be taken not to create pockets where the freezing water does not have adequate room to expand. Frost heaving in pavements and freeze-thaw damage to concrete are problems caused indirectly by the expansion of water on freezing.

Impact of raft ice being carried by wind or current must be considered in exposed locations. Ice floats with greater than 90% of its volume below the surface and may travel at up to about 7% of the wind speed.

Marine Corrosion

Corrosion, in general, is due to an electro-chemical process whereby atoms of a given metal lose electrons (oxidation) thus becoming positively charged. The free electrons then combine (reduction) with atoms of an adjacent area or surrounding substance. The migration of electrons (an electric current) from an *anodic* area to a *cathodic* area may be caused by, or accelerated by, various conditions. Corrosion can be classified according to the conditions or type of electro-chemical process. Some of these processes are briefly mentioned here.

General and pitting corrosion is exhibited by the scaling or pitting of the surface of one metal from reaction with its surroundings and/or a difference in potential between different areas of the same metal. All metals form a thin oxide film when exposed to the atmosphere. This protective film is more or less easily broken down or washed away in some types of metals resulting in further corrosion. Water, especially sea water or acidic water, serves as a transport medium (electrolyte) for electrons and thus accelerates the corrosion process. Alternate wetting and drying accelerates the corrosion process by successively washing away layers of oxide film.

PROPERTIES OF SEA ICE*

SUGGESTED DESIGN VALUES

FOR GENERAL ENGINEERING PURPOSES

SPECIFIC GRAVITY	-	.86 to .92 (average values)
COMPRESSIVE STRENGTH	-	400 to 600 psi (up to 3000 psi for pure fresh water ice)
TENSILE STRENGTH	-	100 to 200 psi
SHEAR STRENGTH	-	few test results
MODULUS OF ELASTICITY	-	1.4×10^6 psi
MODULUS OF RUPTURE	-	200 psi
POISSONS RATIO	-	.35
COEFFICIENT OF THERMAL EXPANSION	-	.000028 (average between -20 and 32° F)
COEFFICIENT OF FRICTION	-	.15 metal to sea ice .10 metal to fresh water ice .01 "wet" ice
ADHESION (FOR PILE JACKING)	-	30 to 100 psi
VOLUMETRIC EXPANSION	-	9% (on freezing) maximum pressure exerted: 30,000 psi

*Above values to be used in lieu of observations or experimental data. Note well that the properties of sea ice are highly variable with respect to temperature, salinity and the rate of freezing. Ice is an ANISOTROPIC material!

Figure 11. Properties of Sea Ice

Crevice corrosion is formed in isolated areas where less oxygen may be available for the repair of the oxide film than on an adjacent exposed surface; thus, a difference in potential is set up.

Selective corrosion, such as the dezincification of some brasses, is a process whereby one particular metal of an alloy is attacked, eventually destroying the alloyed metal's properties.

Stress-corrosion cracking is a process whereby normal corrosion is accel-

erated by tensile stresses within the material.

Corrosion fatigue occurs in cyclically loaded members or members subject to continual load reversals. The working of the material accelerates the corrosion process.

Galvanic corrosion is caused by a difference in electric potential of two dissimilar metals in contact or metals near one another in a conducting medium such as sea water. Electric potentials of various metals are known and therefore galvanic corrosion can be avoided by not using metals with large differences in electric potential in the same area.

Corrosion can be initiated by and accelerated by stray electric currents, various marine organisms such as barnacles, and exposure to wear such as the erosion-corrosion of steel sheeting by exposure to wave and sand action. Structural steel corrodes at an average rate of .005 inch (.13 mm) per year in quiet seawater, but pit growth may be up to ten times as much. In comparison, brasses and other copper alloys corrode at an average rate of .001 inch (.03 mm) per year under the same conditions. Moving water accelerates corrosion of all materials.

Corrosion of steel piles in seawater often follows a characteristic vertical distribution [33]. The rate of corrosion, for example, in a vertical pile is typically light to moderate in the upper part exposed only to the atmosphere as only oxidation corrosion with atmospheric moisture takes place. In the *splash zone* where the structure is intermittently wetted and dried and the protective film of corrosion is continually washed away, the rate of corrosion is usually the greatest; perhaps 3 to 5 times as great as that exposed only to the atmosphere. Just below the high tide mark it often decreases to near minimum as this zone is somewhat protected by an oxygen concentration cell effect; however, in some structures, other than vertical piles, corrosive attack may be heavy in this zone. Increased rates are also found near the low water mark. The rate may be relatively uniform in the continuously immersed portion of the pile, but greater in the upper layers where there is plenty of dissolved oxygen or when there are strong currents to accelerate the galvanic effect. Below the mud line corrosion becomes minimal as there is little or no oxygen present and protective films remain intact. Sometimes, however, increased corrosion rates are observed just above the mud-line due to the presence of sulfate reducing bacteria.

Corrosion can be minimized by functional design, proper selection of materials, protective coatings, inhibitors, impressed currents, and cathodic protection systems using sacrificial anodes. When dissimilar metals are used a galvanic series table should be consulted to verify the potential difference between them. Functional design details would include the avoidance of overlapping plates, discontinuous welds, and connection details that provide crevices or stress concentrations. The use of back-to-back angles or open-ended tube and pipe sections that cannot be maintained is tantamount to inviting future problems.

Marine corrosion in general is well covered in reference [34].

Decay

Wood structures are vulnerable to attack by various forms of fungi, this attack being generally known as *rot*. White rot manifests itself in a bleached, whitish appearance of the wood surface. Brown rot or dry rot sometimes leaves a brown powder residue and the wood surface is visibly eaten away and punky. Fungi require air, water, food and warmth to live and reproduce. Rot will cease when one or more of the above is removed. Isolated areas where fresh water has been trapped are where rot is generally found. Preventing fresh water from collecting is the best way to help prevent rot. Painting and sheathing exposed surfaces also helps in preventing rot from starting and adequate ventilation helps to evaporate trapped moisture.

Marine Borers

Certain mollusks, members of the teredinidae and pholadidae families, and crustaceans, the limnoria, chelura and sphaeroma, bore into and destroy timber exposed in sea water. In general, destruction by marine borers occurs from the high tide level down to the mud line; however, borer attack is usually concentrated from the low water level to the mud line.

The nacerda, known as the *wharf borer*, makes its home in decayed timber above high water. It is a beetle about $\frac{1}{4}$ to $\frac{1}{2}$ inch (6 to 12 mm) long; its whitish grub is about 1 inch (25 mm) long and it eats into and destroys timber [35].

The molluscan borers enter the wood as larvae and only a pinhole is visible at the surface. The borer matures inside the wood, tunneling as it grows, leaving the wood porous on the inside.

The teredo (*shipworm*) is by far the most common and destructive borer. Adult teredos have been recorded as large as 2 inches (50 mm) in diameter and up to 6 feet (2 meters) long. More commonly, they are about $\frac{1}{2}$ inch (12 mm) in diameter and from 6 to 10 inches (15 to 25 cm) long in the tropics and smaller on the average in more temperate climates. They typically line their tunnels with a calcareous deposit. They have a hard, clam-like shell with which they rasp through the wood; their slender, cylindrical bodies are mostly outside the shell. The teredo and its close relative the bankia are generally inactive in water of salinity less than 8 parts per 1000.

The pholads, the martesia being the most common, are known to bore into clay, soft rock, and porous concrete. The martesia's body fits entirely inside its shell and it generally makes a smooth oval pocket exposed at the surface of the wood.

The limnoria (*wood gribble*) is the most common and destructive of the crustacean borers. The limnoria is an isopod usually about $\frac{1}{8}$ inch (3 mm) to $\frac{1}{4}$ inch (6 mm) long. The limnoria eats away at the surface of the wood making shallow furrows which are easily washed out, exposing more surface

for attack. Timber piles attacked by limnoria have an hour glass, necked-down, appearance from the mud line up to the low water level. Limnoria are sensitive to salt content and are generally inactive in salinities below 12 to 16 parts per 1000.

Both molluscan and crustacean borers are distributed worldwide and are relatively abundant as far north as the Arctic circle and as far south as approximately latitude 60 degrees. They are most active in the warmer climates, since in the teredo especially the breeding period is regulated by water temperature [36].

If timber must be used in waters known to be infested, it would be preferable to use a naturally resistant (dense) wood, such as greenheart, azobé, angelique, or other tropical hardwood. Pressure treatment slows down the initial attack but is of little effect in the tropics. Structural woods, such as oak and douglas fir, are not amenable to pressure treatment. Most pines will accept creosote treatment, the normal specification being 16 to 24 pounds per cubic foot (.26 to .39 g/cc.) applied under pressure to a minimum penetration of 4 inches (10 cm).

Various methods of sheathing such as ship's felt with creosoted sheathing boards, metal cladding, and plastic wrapping, have had varying degrees of success. Various systems of impressed alternating currents have been tried without great success. Below the mudline, however, wood will last indefinitely. A new structure in a non-contaminated area will not be attacked unless an infested piece of wood is brought into the near vicinity.

Fouling

Fouling is the attachment of marine organisms to exposed surfaces. Fouling of newly immersed clean surfaces usually follows a characteristic temporal pattern; however, the attachment of the many types of organisms involved may vary widely with local conditions [37]. Within the first week, bacteria and algal slimes give the surface a slimy appearance and form the foundation for the attachment of higher life forms such as hydroids and barnacles and possibly serpulids (tube worms) which usually thrive after three weeks or more immersion in normal temperate to tropical climates. After approximately ten weeks' immersion, larger sessile organisms such as grasses (actually marine algae), tunicates (*sea squirts*), and mussels become prevalent. Fouling organisms are prolific in the euphotic zone (zone of light penetration which extends 500 to 600 feet, 150 to 180 meters, below the sea surface) and taper off rapidly at greater depths.

Barnacles are probably the most tenacious of fouling organisms and are capable of attaching themselves in water velocities of up to 4 knots. Present day anti-fouling paints may discourage such organisms for periods of up to possibly two years after which time they begin to proliferate. Systems of impressed electrical currents have been employed to eliminate fouling with

varying degrees of success. Some alloys such as the copper-nickel alloys, which unfortunately are far too expensive for structural members, exhibit a natural resistance to fouling [38].

The effect of fouling on structural design is to increase both gravity and especially wave and current loads by increasing projected area and surface roughness. In the tropics 6 inches to 1 foot (15 to 30 cm) or more thickness of fouling can be expected on most exposed surfaces. In piling, for example, marine growth can increase the effective pile diameter by a factor of 2 or more. Fouling, therefore, should be considered in current and wave load calculations and structural members should be designed with ease of cleaning and maintenance in mind. The attachment of marine organisms, such as barnacles, may cause differences in electrical potential on the same piece of metal, thus inducing galvanic corrosion.

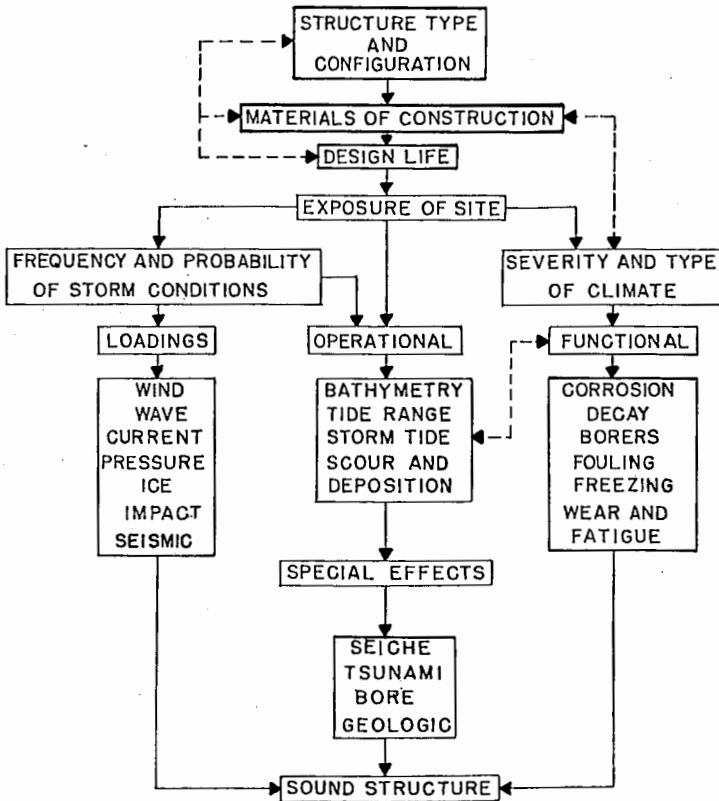


Figure 12. Summary of Design Considerations

Summary and Conclusions

Various factors peculiar to the marine environment, affecting structural design, have been discussed and are summarized in Figure 12. All of these factors should be considered for their potential effect, although they ultimately may not affect a given structure. The ocean environment is one in which environmental loadings must be more carefully investigated than on land-based structures and is an environment in which materials generally deteriorate much more quickly.

Wind, waves, currents, ice, hydrostatic pressure, and impact are the primary sources of loadings a structure must contend with, while it must also stand up to deteriorating agents such as corrosion, attack by marine organisms, wear, and fatigue. It must additionally remain serviceable under the effects of everyday and extreme changes in water levels and scouring and deposition of surrounding bottom material by waves and currents.

There is much work to be done in man's understanding of the ocean environment, of which structural design is an important part, and it is hoped such knowledge will bring about more lasting and compatible structures which will satisfy man's needs while at the same time preserving the beauty and splendor of the oceans.

References

1. Sverdrup, H. V., Johnson, M. W., and Fleming, R. H. *The Oceans* Prentice-Hall, 1942.
2. Defant, A. *Physical Oceanography* Vols. I and II, Pergamon Press, 1961.
3. Wiegel, R. *Oceanographical Engineering* Prentice-Hall, 1964.
4. Ippen, A. *Estuary and Coastline Hydrodynamics* McGraw-Hill, 1966.
5. Myers, J. J., Holm, C. H., and McAllister, R. F., *Handbook of Ocean and Underwater Engineering* McGraw-Hill, 1969.
6. Pierson, W. J., Neumann, G., and James, R. W., *Observing and Forecasting Ocean Waves* U. S. Navy Oceanographic Office, H. O. No. 603, 1955.
7. Bretschneider, C. L. *Revised Wave Forecasting Relationships*, Proceedings of the Second Conf. on Coastal Engineering, Council on Wave Research, 1952. Pages 1-5.
8. Borgman, L. *Risk Criteria*, Journal of Waterways and Harbors Div., A.S.C.E., Vol. 89, ww3, August 1963.
9. Quinn, A. D., *Design and Construction of Ports and Marine Structures*, second ed., McGraw-Hill, 1972.
10. Minikin, R. R., *Wind, Waves, and Maritime Structures*, Griffin and Co., 1960.
11. *Design Manual — Harbor and Coastal Facilities*, DM-26, U. S. Naval Facilities Engineering Command, 1968.
12. Sorensen, R. M., *Basic Coastal Engineering*, John Wiley & Sons, 1978.
13. Bruun, P. *Port Engineering*, second ed., Gulf Publishing Co., 1976.
14. *Shore Protection Manual*, Vols. 1-3, U. S. Army Coastal Engineering Research Center, 1977.
15. Thom, H. C. S., *New Distributions of Extreme Winds in the United States*, Journal of the Structural Division, A. S. C. E., Vol. 94, ST7, July 1968.
16. *Wind Forces on Structures*, Final Report of the Task Committee on Wind Forces of the Committee on Loads and Stresses of the Structural Div., Transactions, A. S. C. E., Vol. 126, Part II, 1961.

17. Airy, G. B. *On Tides and Waves*, Encyclopedia Metropolitana, London, 1845.
18. Bretschneider, C. L. *Selection of Design Wave for Offshore Structures*, Journal of the Waterways and Harbors Div., A.S.C.E., Vol. 84, ww 2, March 1958.
19. Sellars, Frank *Maximum Wave Conditions for Design*, T and R Bull. I-37, prepared for Panel H-7 of the Hydrodynamics Committee, S.N.A.M.E., March 1978.
20. Denny *Further Experiments on Wave Pressures*, Journal of the Institute of Civil Engineers, Vol. 35, 1951.
21. *Recommended Practice for Planning, Designing and Constructing Fixed Offshore Platforms*, American Petroleum Institute, RP-2A, Nov. 1977.
22. *Rules for the Design, Construction and Inspection of Fixed Offshore Structures*, Det Norske Veritas, 1974.
23. *Recommendations for the Design and Construction of Concrete Sea Structures*, Federation de la Precontrainte, 1973.
24. Turekian, K. K., *Oceans*, Prentice Hall, 1968. Pages 30-31.
25. Bowditch, N. *American Practical Navigator* U. S. Navy Oceanographic Office, H. O. No. 9, 1977. Pages 754-777.
26. Sibul, O. J. and Johnson, J. W., *Laboratory Study of Wind Tides in Shallow Water*, Journal of the Waterways and Harbors Div., A. S. C. E., Vol. 83, ww 1, April 1957.
27. Ho, F. P., *Hurricane Tide Frequencies on the Atlantic Coast*, Proc. of the 15th Coastal Engineering Conf., Chapter 52, A.S.C.E., 1976.
28. Hansen, U. A. *Wave Set Up and Design Water Level*, Journal of the Waterway, Port, Coastal, and Ocean Division, A. S. C. E., Vol. 104, ww 2, May 1978.
29. Hicks, S. D. and Shofnos, W. *Yearly Sea Level Variations in the United States*, Journal of the Hydraulics Div. A. S. C. E., 1965.
30. VanDorn, W. G., *Tsunami Engineering*, Topics in Ocean Engineering, Vol. 3, part 9, Gulf Publishing Co., 1976.
31. Gerritsen, F. *The Effect of Ice on Hydraulic Structures*, Topics in Ocean Engineering, Vol. 3, part 7, Gulf Publishing Co., 1976.
32. Brown, C. B. *AIDJEX Results on Arctic Ice Mechanics*, Journal of the Structural Div., A. S. C. E., Vol. 104, ST2, February 1978.
33. Ayers, J. R. and Stokes, R. C. *Corrosion of Steel Piles in Seawater*, Journal of the Waterways and Harbors Div., A. S. C. E., Vol. 87, ww 3, August 1961.
34. LaQue, F. L., *Marine Corrosion*, John Wiley and Sons, 1975.
35. *Marine Biology Operational Handbook*, Department of the Navy, Bureau of Yards and Docks, MO-311, 1965.
36. *Harbor Reports on Marine Borer Activities*, Department of the Navy, Bureau of Yards and Docks, P-43, June 1950.
37. *Marine Fouling and Its Prevention*, Woods Hole Oceanographic Institute for the U. S. Naval Institute, 1952.
38. *The Interrelation of Corrosion and Fouling of Metals in Seawater*, Bulletin of the International Copper Co., 1975.

PROCEEDINGS
BOSTON SOCIETY OF CIVIL ENGINEERS SECTION
AMERICAN SOCIETY OF CIVIL ENGINEERS

Meetings Held — Technical Groups

Construction Group

May 23, 1978. Joint meeting; see Geotechnical Group notes below.

October 24, 1978. Dinner meeting at Ell Student Center, Northeastern University. Mr. Marvin Gates, of Gates-Scarpa Assoc. Construction Estimates, Inc., spoke on bidding and estimating. Attendance 20.

Environmental Group

October 18, 1978. Joint meeting; see Hydraulics Group notes below.

Geotechnical Group

May 23, 1978. Joint meeting with Construction Group; dinner meeting at Tufts University. Mr. Francis C. Pierce of CE Maguire, Inc. and Mr. Robert E. Smith of Atlantic Richfield Company, Dallas, Texas spoke on challenges in design of marine structures in New England. Attendance 60.

September 26, 1978. Dinner meeting at Tufts University. Mr. Robert Barrett of Nicolon Corp., Cincinnati, and Mr. Robert Carrol of Celanese Fibers Marketing Corp., Charlotte, North Carolina, spoke on geotechnical engineering applications for woven and non-woven fabrics. Attendance 50.

October 25, 1978. Dinner meeting at Blossoms in the West End. Dr. John H. Schmertmann spoke on "The Use of the Dutch Cone Penetrometer and its Relation to the Standard Penetration Test." This was also an official meeting of the Section. Attendance 80.

Hydraulics Group

September 27, 1978. Dinner meeting at the Aquarium Restaurant. Mr. John Desmond of Francis Associates, Cambridge and Mr. Louis Garibaldi, Director of Operations at the New England Aquarium, spoke on "Design, Construction, Operation and Maintenance of the Water Processing Facilities at the New England Aquarium." There was a tour of the hydraulic facilities. This was also an official meeting of the Section. Attendance 55.

October 18, 1978. Held jointly with Environmental Group. Tour of the Town of Cohasset's new dam, control structure and water treatment plant; dinner meeting at Hugo's in Cohasset Harbor, where the speakers were Mr. Arthur Vulgaropulos, Hydrologist and Frederick G. Aufiero, Associate of SEA Consultants, Inc., who spoke on design and construction of the reinforced concrete ogee spillway. Attendance on the tour, 19; at the dinner meeting, 54.

Structural Group

October 4, 1978. Evening meeting at Northeastern University. This was the AISC T. R. Higgins Lecture entitled "Seismic Design Practice for Steel Buildings" and presented by Mr. Edward J. Teal, Seismic Engineering Associates, Inc., Los Angeles. Attendance 175.

Transportation Group

May 24, 1978. Luncheon meeting at Purcell's Restaurant. Mr. Lester P. Lamm, Executive Director, Federal Highway Administration, spoke on House and Senate versions of the pending 1978 federal transportation bill. Attendance 56.

September 20, 1978. Luncheon meeting at Nick's Restaurant. Mr. Barney Frank, member of the Massachusetts Legislature, spoke on current activities in the City of Boston on transportation improvements, restrictions on the automobile, and MBTA service. Attendance 36.





ANDERSON-NICHOLS
& Company, Inc.

A COMPREHENSIVE ENGINEERING AND MANAGEMENT SERVICE

Consulting Engineers

Boston Concord Hartford
Massachusetts New Hampshire Connecticut

CAMP DRESSER & McKEE INC.

Offices Throughout the U.S.

One Center Plaza
Boston, Massachusetts 02108

*environmental engineers, scientists,
planners, & management consultants*

CDM

THE AUSTIN COMPANY
Designers • Engineers • Builders

★ ★ ★

General Offices: Cleveland, Ohio 44121
Offices in principal cities of North America,
Europe, South America and Australia
Wellesley Hills, Mass. 02181 Tel. (617) 237-1438

ANDREW CHRISTO, Engineers
CONSULTING ENGINEERS

230 Boylston Street
Boston, Mass. 02116
Tel. 266-2525

BARNES ENGINEERING
COMPANY, Inc.

Civil Engineers

411 Lexington Street

AUBURNDALE, MASS. 02166

CR

(617) 482-3440

COFFIN & RICHARDSON
Architects and Engineers

Water Supply and Wastewater Engineering
Rates and Valuations

141 Milk Street, Boston, Massachusetts 02109



CLINTON BOGERT ASSOCIATES

Consulting Engineers

Water Resource Development • Wastewater Management
Flood Control • Regional Planning • Value Engineering
Industrial Waste Treatment • Solid Waste Management
Municipal Engineering

2125 Center Avenue, Fort Lee, N.J. 07024
(201) 944-1676

Congdon, Gurney
& Towle, Inc.

Engineers

53 State Street Boston, Mass.

BRASK & STANDLEY
ENGINEERING CO.

Consulting Engineers

177 State Street, Boston
227-3170

CRANDALL DRY DOCK
ENGINEERS, Inc.

Dry Docks — Piers — Waterfront Structures
Underwater Examination


21 Pottery Lane Dedham, Mass.

HERBERT J. ALBEE, P.E.
ASSOCIATED
ENGINEERS
ARCHITECTS
 857 WASHINGTON STREET
 BRAINTREE, MA. 02184
 848-8117

**FAY, SPOFFORD &
 THORNDIKE, INC.**
Engineering
for
Public Works and Industry
 One Beacon Street, Boston, Mass. 02108

**De Leuw, Cather
 &
 Company**
Engineers
 Public Transit — Traffic — Parking
 Highways — Subways — Railroads
 Community Planning — Urban Renewal
 Municipal Works — Port Development
**24 SCHOOL STREET
 BOSTON, MASS. 02108**

Ganteaume & McMullen
Engineers
**99 Chauncy Street
 BOSTON**


RICHARD J. DONOVAN, INC.
 ENGINEERS: Design & Construction Management
 540 MAIN ST., WINCHESTER, MASS. 01890

GERAGHTY & MILLER, INC.
*Consulting Ground-Water Hydrologists
 Water Supply-Quality and
 Pollution Problems
 Regional Ground-Water Studies
 Recharge-Well Design*
 44 Sintsink Drive East
 Port Washington, N.Y. 11050
 516-883-6760
 Jacksonville, Fla. Hartford, Conn.
 Ponce, P. R.

**E&K EDWARDS
 and KELCEY**
Engineers and Consultants
470 Atlantic Ave., Boston, Mass.


**GOLDBERG, ZOINO, DUNICLIFF
 & ASSOCIATES, INC.**
 Geotechnical Consultants and Geologists
 Foundations
 Soil and Rock Mechanics
 Geology and Geohydrology
 Geotechnical Instrumentation
 30 Tower Road • Newton Upper Falls
 Mass. 02164 617-244-4100

EUSTIS ENGINEERING CO.
Soil and Foundation Consultants
**Soil Borings Laboratory Tests
 Foundation Analyses and Reports**
**3011 28th ST. P. O. BOX 125
 METAIRIE, LOUISIANA 70004**

• WATER •
 • WASTEWATER •
 • SOLID WASTES •
 Chicago • New York • Philadelphia • Richmond • Tampa • Atlanta
GH GREELEY AND HANSEN

HALEY & ALDRICH, INC.
*Consulting Geotechnical Engineers
 and Geologists*

**Soil and Rock Mechanics
 Engineering Geology Engineering Geophysics
 Foundation Engineering Terrain Evaluation**

238 Main Street, Cambridge, Mass. 02142
 617-492-6460

KEYES ASSOCIATES

Engineers/Planners

- Master Planning • Industrial Parks • Commercial Office and Industrial Buildings • Manufacturing Facilities • Process Piping
- Machinery Layout • Environmental Analyses • Waterworks
- Mechanical and Electrical Engineering • Waterfront Projects
- Sewage and Industrial Wastes • Dams Flood Control
- Highways Bridges Airports • Schools Housing Projects
- Studies, Reports, Designs, Plans & Specs

• Providence, R.I. • William, Mass
 • Wethersfield, Ct. • Nashua, N.H.

Haley and Ward

Civil and Sanitary Engineers

25 Fox Road - Waltham, Mass. 02154

Tel. 890-3980 Area Code 617

REPORTS • DESIGN • SUPERVISION

- WATER SUPPLY • SEWERAGE • DRAINAGE • SOLID WASTES
- HIGHWAYS • BRIDGES • AIRPORTS
- COMMERCIAL AND INDUSTRIAL BUILDINGS
- WATERFRONT FACILITIES • DAMS

CE MAGUIRE, INC.

ENGINEERS PLANNERS

PROVIDENCE, R.I. WALTHAM, MASS. NEW BRITAIN, CT.
 NEWINGTON, N.H. WETHERSFIELD, CT.

Testing • Inspection • Consultation
 Engineering Services



**The Haller Testing Laboratories
 of Massachusetts, Inc.**

68 LAUREL STREET • WATERTOWN, MASS. 02172
 TEL. AREA CODE 617 924-2321

MAIN

CHAS. T. MAIN, INC.
Engineers

Studies, Reports • Design • Construction Management

Southeast Tower, Prudential Center, Boston, Mass. 02116, Tel. (617) 262-3200
 1301 E. Morehead St., Charlotte, North Carolina 28204, Tel. (704) 375-3761

Hardesty & Hanover
Consulting Engineers

Bridges, Special Structures
 Highways & Streets

Heavy Machinery, Sewers, Pipelines

Electrical Controls, Lighting,

Soil Mechanics & Foundations

Design - Reports - Inspection

101 Park Ave. New York, N.Y. 10017

Our Services Make A World Of Difference



METCALF & EDDY
 Headquarters Office

50 Staniford St., Boston, Mass. 02114
 Birmingham, Chicago, New York, Oklahoma City, Palo Alto

J. F. HENNESSY

Civil Engineer

BROOKLINE, MASS. 02146

4 CYPRESS STREET 566-3860

H.W. MOORE ASSOCIATES, INC.

Consulting Engineers

Civil — Structural — Sanitary
 Urban Planning and Transportation

112 SHAWMUT AVENUE Tel.
 BOSTON, MASS. 02118 357-8145

HNTB HOWARD NEEDLES
 TAMMEN & BERGENDOFF

Planning and design for:
Transit Airports
Highways Environmental systems
Bridges Public and Private Buildings

Offices in 22 cities
 Suite 3050, Prudential Center,
 Boston, Mass. 02199 617 267-6710

**New England Survey Service Inc.
 William S. Crocker, Inc.**

Civil Engineers and Land Surveyors

**First Order Surveys
 Geodetic Surveys
 Photogrammetric Surveys**

1220 Adams St., Lower Mills, Boston, Mass. 02124
 Tel: 287-1057
 287-9059

JAMES A. O'DAY, INC.

CONSULTING ENGINEERS

*Civil/Structural - Rate and Appraisal Studies
Water Supply - Wastewater
Utility Management - Telecommunications*

4 Park Street
Andover, Massachusetts 01810
617-470-0606

TAMS
TIPPETTS-ABBETT-McCARTHY-STRATTON
ENGINEERS AND ARCHITECTS

850 BOYLSTON STREET
BROOKLINE, MASS. 02167
(617) 731-1550

HERMAN G. PROTZE
MATERIALS TECHNOLOGIST

36 Jaconnet Street
Newton Highlands, Mass.

TESTING INSPECTION RESEARCH
DEVELOPMENT CONSULTATION

tec tibbets engineering corp.
CONSULTING ENGINEERS
CIVIL / SANITARY / STRUCTURAL

210 DEANE STREET, NEW BEDFORD, MASS. 02746
TEL. (617) 996-5633

Maurice A. Reidy Engineers

101 Tremont Street

Boston, Massachusetts 02108

CHARLES R VELZY
ASSOCIATES, INC.

Consulting Engineers
Air & Water Pollution Control
Water Supply - Drainage
Solid Waste Disposal
Industrial Wastes

Mineola, N.Y. Babylon, N.Y.
*355 Main St. Armonk N.Y. 10504

STORCH | ENGINEERS

Boston, Mass. Hempstead, N.Y.
Wethersfield, Conn. Florham Park, N.J.

WESTON & SAMPSON ENGINEERS, INC.
10 High St.
Boston, Mass. 02110

WATER SUPPLY TREATMENT DISTRIBUTION
RATE STUDIES SUPERVISION OF TREATMENT
WATER and AIR POLLUTION STUDIES and DESIGN
INDUSTRIAL WASTE TREATMENT
SOLID WASTE PLANNING AND MANAGEMENT

SHANNON & WILSON, INC.
Geotechnical Consultants

Soil & Rock Mechanics • Seismic Response
Foundation Engineering • Instrumentation
Geology & Geophysics • Hydrogeology
Seattle • Spokane • Portland
San Francisco • Fairbanks • St. Louis



WHITMAN & HOWARD, INC.
ENGINEERS & ARCHITECTS

45 WILLIAM STREET, WELLESLEY, MASS. 02181
TEL. 617-237-5000

THE THOMPSON & LIGHTNER CO., INC.
Engineers

Designs and Engineering Supervision
Investigations, Testing and
Inspection of Structural Materials
Concrete, Asphalt, Soils Control

Offices and Laboratory, 8 Alton Place, Brookline 46, Mass



77 North Washington Street
Boston, Massachusetts 02114
(617) 227-6666

Engineers Architects Planners Consultants

For Surveyors, Builders & Engineers
A Complete In-stock Selection of

Instruments and Accessories Drafting and Field Supplies

Kern Dietzgen
Gurley David White
Nikon Lufkin
Lietz Plan-Hold
Path Koh-I-Noor
and others

Modern Repair Department with more than 25 years' experience. Complete facilities for repairing Theodolites, Engineers and Builders Instruments. **Rentals** of current model surveying instruments with purchase option.



Carl Heinrich Company

711 Concord Ave., Cambridge, Mass. 02138
Tel. 617-864-4840



FRANKI

foundation specialists

PRESSURE INJECTED FOOTINGS
CAST-IN-PLACE PILES · CAISSONS
STRUCTURAL WALLS AND CUT-OFFS BY SLURRY TRENCH PROCESS

FRANKI FOUNDATION COMPANY

916 STATLER OFFICE BUILDING · BOSTON, MASSACHUSETTS 02116 · PHONE (617) 426-4369

WARREN BROTHERS COMPANY

Division of
ASHLAND OIL INC.

Massachusetts District Office

**430 Howard Street
Brockton, Mass. 02402**

Tel. 588-3660

CRUSHED STONE

BITUMINOUS CONCRETE

RAYMOND INTERNATIONAL INC.

and


SPENCER, WHITE & PRENTIS, INC.

21 Franklin Street

Quincy, Mass. 02169

Telephones: R.I.I. 472-5078/9

S.W.P. 773-9245

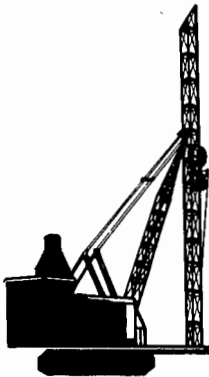

CARTER PILE DRIVING Inc.

- H - P I L E S
- T I M B E R P I L E S
- C A S T I N P L A C E

72 BACON STREET, NATICK, MASSACHUSETTS 01760

TEL. NATICK 653-7423 • WELLESLEY 235-8488

Please mention the Journal when writing to Advertisers

**CARR-DEE TEST BORING
AND CONSTRUCTION CORP.**

*Complete Soil Investigation Service
Anywhere in New England*

**37 LINDEN ST.
MEDFORD, MASS. 02155**

**Phone:
617 - 391-4500**

NEW ENGLAND FOUNDATION CO., INC.

Foundation Contractors

**376 BOYLSTON STREET
BOSTON 16, MASS.**

CAISSONS

**DRILLED
BELL BOTTOM
UNDERREAMED PIERS
DRIVEN**

PILING

**WOOD
COMPOSITE
CONCRETE
STEEL**

P. Gioioso & Sons, Inc.

GENERAL CONSTRUCTION

58 SPRAGUE STREET

HYDE PARK

MASSACHUSETTS 02136

New England Concrete Pipe Corp.

NEWTON UPPER FALLS, MASSACHUSETTS

(617) 969-0220

MANUFACTURERS OF

Plain and Reinforced Concrete Sewer and Culvert Pipe

Pre-cast, Pre-stressed Concrete Structural Units

PLANTS

Newton, Dedham, Westfield, Plainville, Massachusetts

We're Handy!



UPTOWN

320 Stuart St., Boston 02116
426-1160

DOWNTOWN

15 Lancaster St., Boston 02114
227-8131

ACROSS-TOWN

2089 Mass. Ave., Cambridge 02140
492-6796

MEMBER C.R.S.I.

BARKER STEEL COMPANY, INC.

42 SCHOOL STREET
WATERTOWN, MASS. 02172
617-926-0100

FABRICATORS
CONCRETE REINFORCING BARS

**BOSTON SOCIETY OF
CIVIL ENGINEERS SECTION, ASCE**

Committee Chairmen, 1978-1979

<i>Committee</i>	<i>Chairman</i>
ACTION PROGRAM - PROFESSIONAL PRACTICE	Rodney P. Plourde
ADVERTISING	John P. Hurney
ANNUAL MEETING	Frank E. Perkins
AUDITING	Edward B. Kinner
AWARDS	Edward B. Kinner
CONSTITUTION AND BYLAWS	Max D. Sorota
THOMAS R. CAMP FUND	Warren H. Ringer
CONTINUING EDUCATION	Ronald E. Sharpin
DISADVANTAGED YOUTH	Richard J. Scranton
EMPLOYMENT CONDITIONS	Maurice Freedman
JOHN R. FREEMAN FUND	Lee M.G. Wolman
HISTORY AND HERITAGE	H. Hobart Holly
INVESTMENT	Saul Namyet
KEY MAN	Robert M. Fitzgerald
MEMBERSHIP	Philip J. Caruso
NEWSLETTER	Leo F. Peters
NOMINATING	Charles A. Parthum
OPERATIONS MANUAL PROGRAM	Edward B. Kinner
PUBLIC RELATIONS	Frank E. Perkins
PUBLICATIONS	Frank E. Perkins
SOCIAL AFFAIRS	William S. Zoino
STUDENT CHAPTERS	Robert A. Snowber
TASK FORCE, 1979 NATIONAL CONVENTION	Roger F. Gardner Bertram Berger

Division Chairmen

<i>Division</i>	<i>Chairman</i>
ADMINISTRATIVE DIVISION	Edward B. Kinner
GENERAL TASKS DIVISION	Richard J. Scranton
PROFESSIONAL AND SOCIETY AFFAIRS DIVISION	Robert L. Meserve
TECHNICAL DIVISION	Stanley C. Rossier

